


Safety Instructions

1, 2, 3, 4, 5, 6, 7, 10, 12, 15, 16,
19, 20, 24, 28, 33, 34



www.paulmann.com/symbols


Paulmann Licht GmbH
Quezinger Feld 2
31832 Springe
Germany



www.paulmann.com

Art.-Nr.: 937.51


(+MA173) PSU 03/21






1x




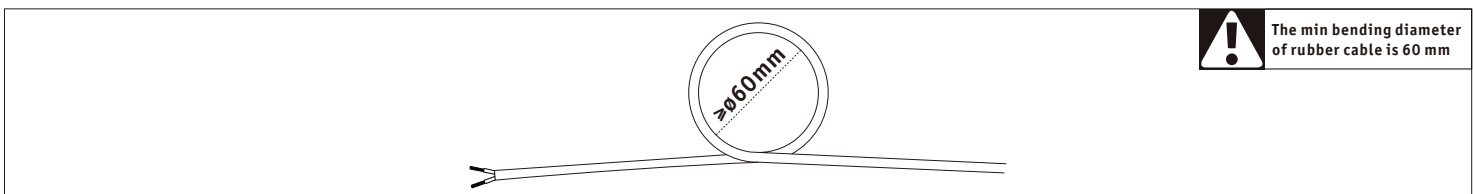
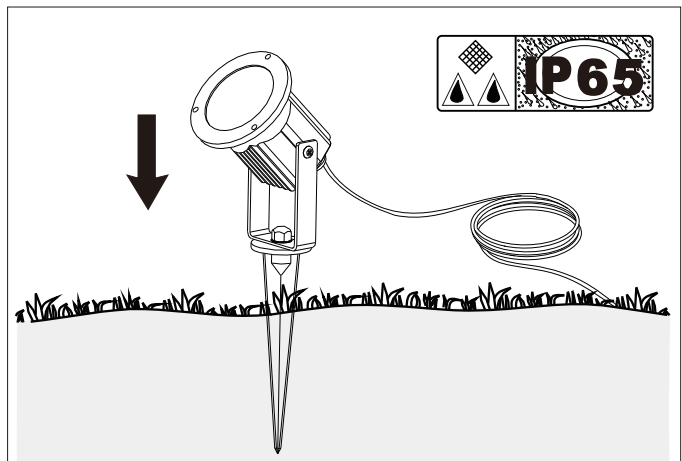
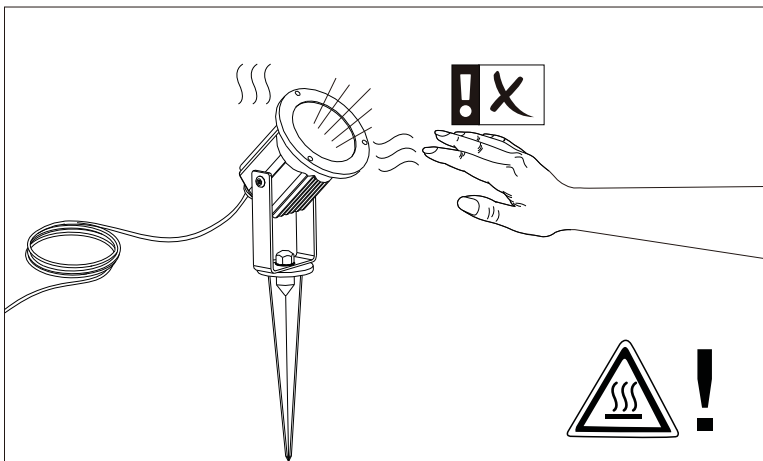
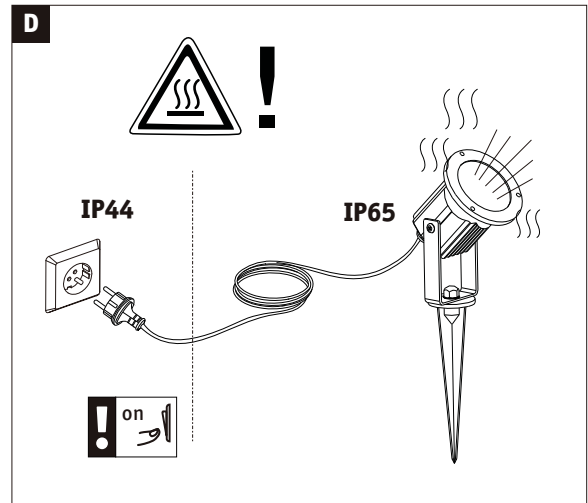
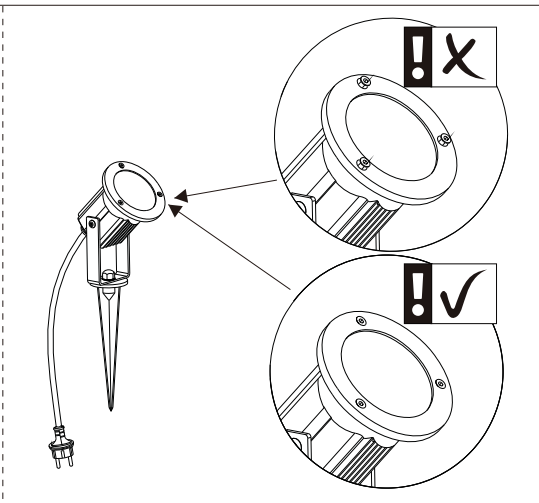
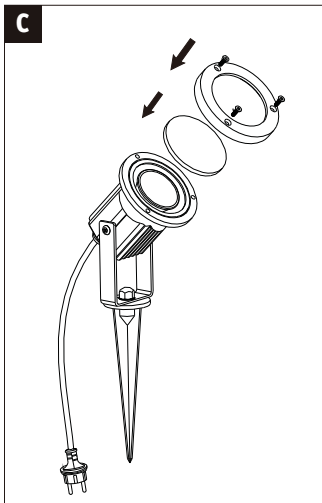
1x




Incl.

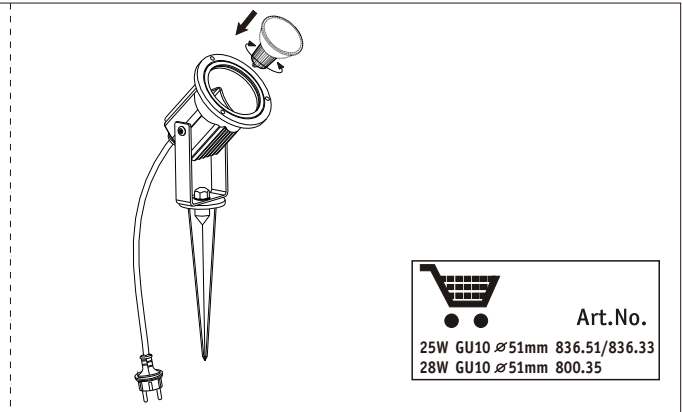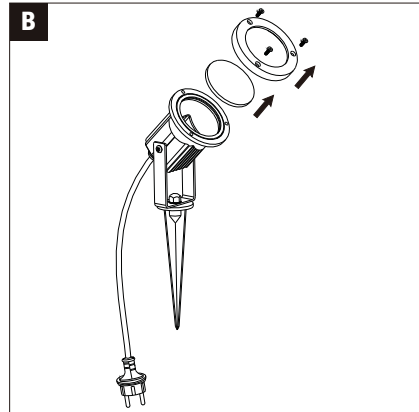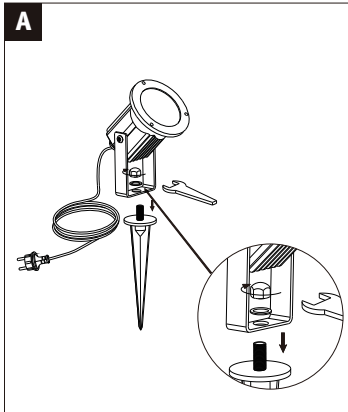

 Art.No.
25W GU10 \varnothing 51mm 836.51/836.33
28W GU10 \varnothing 51mm 800.35



 The min bending diameter of rubber cable is 60 mm

